




# PRODUCT DIMENSIONS & SPECIFICATIONS

## CH SERIES SLAB HORIZONTAL COILS

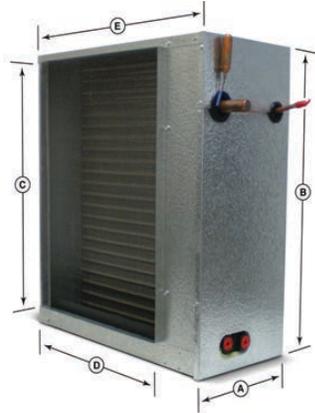

Representative drawing only.  
Some models may vary in appearance.

### STANDARD SPECIFICATIONS

- Rified copper tubing, enhanced aluminum fins.
- Immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Liquid line - 3/8" ODS, suction line - 3/4" ODS on 1-1/2- 3 ton & 7/8" ODS on 3-1/2 - 5 ton.
- Two 3/4" FPT condensate drains (primary and secondary)
- Powder-painted stainless steel drain pans.
- Externally mounted flowrater body with Schrader valve for hiss-testing.
- Split access doors for easy service.
- Fully insulated cabinets with faced insulation.
- AHRI certifiable with all brands of A/C and heat pump systems.
- ETL listed for use with both R-22 and R-410a when proper metering device is used.
- Ten-year limited warranty.

### POPULAR OPTIONS:

- Factory or field-installable TXV.
- Schrader mounted on suction manifold, external to cabinet.

| COIL MODEL | FLOW RATOR SIZE |       | DIMENSIONS |        |         |    |        | SHIPPING INFORMATION  |       |       |          |
|------------|-----------------|-------|------------|--------|---------|----|--------|-----------------------|-------|-------|----------|
|            |                 |       | WIDTH      | HEIGHT | OPENING |    | LENGTH | SHIPPING WEIGHT (LBS) |       |       | SKID QTY |
|            |                 |       | A"         | B"     | C"      | D" | E"     | 2 ROW                 | 3 ROW | 4 ROW |          |
| CH24A*     | 0.059           | 0.055 | 10         | 23-1/2 | 21      | 16 | 21-1/2 | 20                    | 34    | N/A   | 14       |
| CH24B*     | 0.059           | 0.055 | 10         | 23-1/2 | 21      | 24 | 29-1/2 | 29                    | 43    | N/A   | 14       |
| CH36A*     | 0.074           | 0.068 | 10         | 23-1/2 | 21      | 24 | 29-1/2 | 29                    | 43    | N/A   | 14       |
| CH36B*     | 0.074           | 0.068 | 10         | 23-1/2 | 21      | 30 | 35-1/2 | 35                    | 49    | N/A   | 14       |
| CH48A*     | 0.084           | 0.080 | 10         | 23-1/2 | 21      | 30 | 35-1/2 | 35                    | 49    | N/A   | 14       |
| CH48B*     | 0.084           | 0.080 | 10         | 23-1/2 | 21      | 36 | 41-1/2 | 42                    | 56    | N/A   | 8        |
| CH59A*     | 0.092           | 0.089 | 10         | 23-1/2 | 21      | 30 | 35-1/2 | N/A                   | 49    | N/A   | 14       |
| CH60A*     | 0.092           | 0.089 | 10         | 23-1/2 | 21      | 36 | 41-1/2 | N/A                   | 56    | 70    | 8        |
| CH60B*     | 0.092           | 0.089 | 10         | 23-1/2 | 21      | 42 | 47-1/2 | N/A                   | 66    | 80    | 8        |

Phone: 281.441.6500  
Toll Free: 800.423.9007  
Fax: 281.441.6510  
[www.aspenmfg.com](http://www.aspenmfg.com)



\* For complete warranty details visit [www.aspenmfg.com](http://www.aspenmfg.com).